



Proposals of research projects for graduate thesis



Dr. Norberto Arzate Plata
narzate@cio.mx

October 2021

Contents

Optical properties of atomic MLs

NL effects in PCFs

Title: Optical properties of atomic monolayers (MLs)

Specialization Area : Photonics.

Postgrade Program : Master and Doctorate in Sciences.

General Objective : To perform a theoretical study of the linear and non linear (NL) optical properties of atomic MLs.

Particular Objectives :

- To calculate the dielectric function.
- To calculate the second order nonlinear susceptibility.

Group : Optical Properties of Nano systems, surfaces and interfaces.

Colaboration with : Dr. Bernardo Mendoza Santoyo.

Title: Spin injection in atomic MLs

Specialization Area : Photonics.

Postgrade Program : Master and Doctorate in Sciences.

General Objective : To perform a theoretical and numerical study of the spin injection in atomic MLs.

Particular Objectives :

- To calculate the degree of spin polarization.
- To calculate the spin injection current.

Group : Optical Properties of Nano systems, surfaces and interfaces.

Collaboration with : Dr. Bernardo Mendoza Santoyo.

Atomic monolayers (MLs)

- Layered crystals form in an array of atomic MLs and are called two dimensional (2D) materials.
- Since the discovery of graphene, 2D materials have been a subject of study due to their potential applications.
- Examples of layered crystals are graphene, molybdenum disulfide, boron nitride, etc.
- Atomic structures of one and few MLs present different physical properties than those of the respective bulk crystals.




Figure: Atomic scheme (left) and films (right) of graphene. Novoselov, Geim et al. prepared graphitic sheets of thickness down to a few atomic layers, including a single layer graphene, to fabricate devices and to study their electronic properties. [Novoselov et al., *Science*, **306**, 666 (2004)]

Example: Quintulayer (QL) α -In₂Se₃ structures

Figure: Top and side views of 1QL of α -In₂Se₃ structure with wurtzite type configuration.

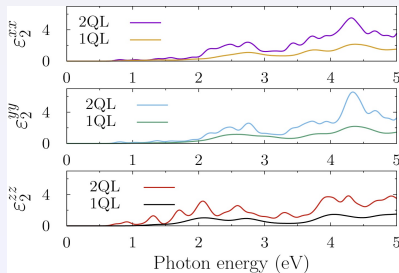



Figure: Spectra of components of the imaginary part of dielectric function.






Figure: Spectra of the second order NL susceptibility.

Conclusions:

- The linear response is sensitive to the number of QLs.
- The NL response is more sensitive to atomic-structure changes.


Example: spin injection on MoS₂ MLs

Figure: Top and side views of a MoS₂ bilayer.

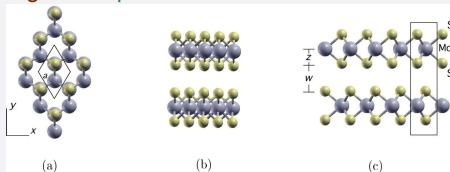

(a)

Figure: a) Spectra of the degree of spin polarization D^z for bulk and n -monolayer (n ml) MoS₂ structures, under incidence of circularly polarized light. (b) Maximum $|D^z|$ values.



(b)

Conclusion: Incidence of circularly polarized light on 1ml MoS₂ structure will inject 100% of spin-polarized electrons on the conduction bands in direction $-z$, having a degree of spin polarization value of -1 . [Arzate et al., PRB **93**, 115433 (2016)]

Title: Non linear (NL) effects in PCFs

Specialization Area : Fiber Optics and Lasers

Postgrade Program : Master and Doctorate in Sciences.

General Objective : To perform a theoretical study of the non linear effects that takes place during the propagation of optical pulses in PCFs

Particular Objectives :

- To calculate the modal optical properties of PCFs.
- To obtain the evolution of pulses along its propagation in PCFs such as:
 - Pulse compression.
 - Self-frequency shift.
 - Raman shift.
 - Four wave mixing.
 - Soliton dynamics.
 - Supercontinuum.

Colaboration with : Dr. Ismael Torres Gómez

Title: PCF sensors based on NL effects

Specialization Area : Fiber Optics and Lasers

Postgrade Program : Master and Doctorate in Sciences.

General Objective : To propose sensing schemes based on NL effects in PCFs

Particular Objectives :

- To obtain the evolution of pulses along its propagation in the proposed PCF sensing scheme.
- To obtain dispersion and NL parameters for sensing physical properties such as refractive index, temperature, pressure, strain, salinity, magnetic field, etc.

Colaboration with : Dr. Ismael Torres Gómez

Photonic Crystal Fibers (PCFs)

- PCFs are optical fibers that have a periodic refractive index in its transversal section, while it is constant along its axial axis.
- PCFs favor the generation of NL effects.
- The study of NL effects during the propagation of optical pulses in PCFs have been a subject of great interest to the photonics community due to their novel potential applications they present.




Figure: Images of the transversal section of different PCF structures.

[Russell, Science **299**, 358 (2003)]

Example: self-frequency shift of solitons




Figure: Cross section of the modeled hole-core photonic band gap fiber (HC-PBGF).

Conclusion: The input pulse gets compressed (or broadened of the spectrum), reaching its maximum compression at the onset of soliton fission. The resultant sub-pulse also gets compressed and broadened and, then follows the formation of a soliton which central wavelength redshifts during its propagation

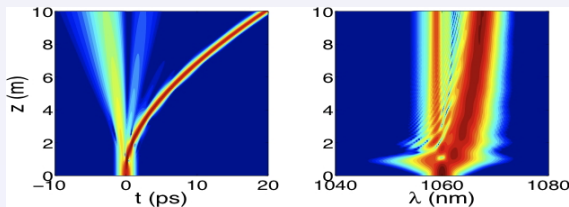


Figure: Temporal (left) and spectral (right) evolution of an input soliton pulse along its propagation in the modeled HC-PBGF.

[González-Baquedano et al., Optics Express **21**, 9132 (2013)]

Example: Proposal of a NL sensor





Figure: Proposed novel surface plasmon resonance (SPR) sensor based on four wave mixing (FWM) technique.

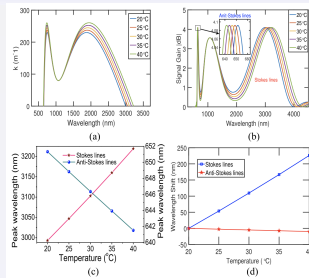

[N. Nallusamy et al. Sensors Letters **2**, June (2018)] Figure: a) Phase mismatch, b) FWM spectrum, c) FWM-signal-peak wavelength, and d) wavelength shift.

Conclusion: The proposed NL sensor monitors Stokes and anti-Stokes photon wavelength shift under variation of temperature T and salinity S . The respective sensitivities are 11.31 and -0.49 nm/°C for the Stokes and anti-Stokes lines, respectively. The extrinsic sensor can measure both T and S of an analyte simultaneously.